



Winterization Procedure



Important Seasonal Reminder *for Spa Owners*

Strong Spas invites you to enjoy your spa year-round, but should you choose to close up your spa for the winter, please follow Proper Winterization Procedures.

If you have any questions, please call Strong Spas Technical Support department at 1-800-787-6649. You may also wish to contact a professional to perform these services for you.

Damage caused by improper winterization is not covered under the Strong Spas Warranty.

Strong Spas™ 1-800-787-6649 email: info@strong9.com

Spa Winterization Procedure

1. Turn off power at the GFCI circuit breaker before draining or servicing your spa.
2. Open access door, or remove exterior panels by inserting a flathead screwdriver at the bottom edge of the panel and prying out. (Figure 1).
3. Attach a garden hose to the drain and open the blue ball valve (Figure 2). Water will start to drain. You may have some water left in the spa shell that did not drain. Remove it with a wet-vac or by hand with a small cup.
4. Loosen all unions from heater and pump(s) to let excess water drain from the lines (Figure 3). **Your spa may have more than one pump. Be sure to follow winterization procedures for each pump and all unions.**
5. Remove lowest drain plug on front of each pump (Figure 4). Drain out any water in pump(s).



FIGURE 1



FIGURE 2

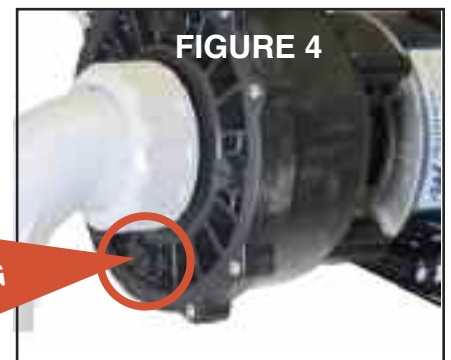
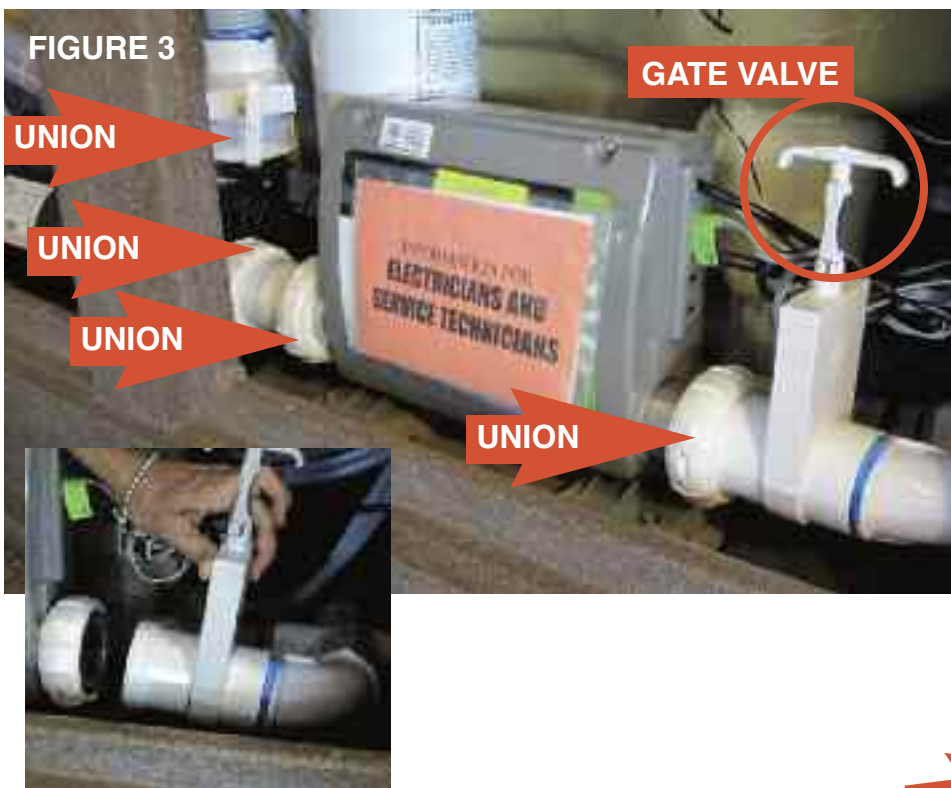


FIGURE 4

PLUG

Questions? Call 1-800-787-6649

6. After the spa has drained, you **MUST** also use a wet-vac to remove the water from the lines by vacuum/suction. Water left in the lines and jets will freeze and damage them.

To adequately clean out the lines, place the wet-vac for 10-15 seconds over: each drain (Figure 5); each union (Figures 6 and 7); each jet face (Figure 8); each suction (Figure 9); and the filter cavity (Figure 10). See your manual for filter removal procedure.



FIGURE 5



FIGURE 6



FIGURE 7



FIGURE 8



FIGURE 9



FIGURE 10

7. After all the water is removed from the spa, jets, and plumbing, re-insert drain plug into each pump (Figure 4). Tighten all unions and make sure all gate valves are open with clips installed (Figure 3).

8. Pour a gallon of spa antifreeze into the top of each pump (Figure 11) and a gallon into the filter cavity (Figure 12).

9. Replace all exterior panels.

10. Close your spa cover.



FIGURE 11



FIGURE 12

Important Seasonal Reminder *for Spa Owners*

**Strong Spas invites you to enjoy your spa year-round,
but should you choose to close up your spa for the winter,
please follow Proper Winterization Procedures.**

**If you have any questions, please call Strong Spas Technical Support
department at 1-800-787-6649.**

**You may also wish to contact a professional
to perform these services for you.**

**Damage caused by improper winterization is not covered
under the Strong Spas Warranty.**



Please call Strong Spas Technical Support department
at 1-800-787-6649 with any questions.

